

823-9294-225 - Three-Phase Ventilated-USA-DOE

Product Details	
KVA	225.00
UPC#	41228
Enclosure	NEMA 3R Ventilated
Phase	Three-Phase
Line Voltage	480V-Delta
Load Voltage	208Y/120V
E/S Shielded	No
Windings	Aluminum
Temp. rise	150°
Frequency	60 Hz
Taps	2- 2.5% FCAN; 4- 2.5% FCBN
Impedance	5.1
Total loss (17°C)	5057.00
Regulation (full load)	PF 1.0=2.51 PF 0.8=4


Product Details	
Efficiency Type	DOE-2016
Minimum Efficiency (35%)	98.94
Sound	55 db Max
Approvals	UL, cUL, DOE

weight & Dimensions (Imperial / Metric)		
A	46.00"	116.84 ems
B	35.00"	88.9 ems
C	37.00"	93.98 ems
D	31.50"	80.01 ems
E	25.00"	63.5 ems
Est Ship Wt	1545.00 lbs	700.80 kg

T480E Wiring Diagram & Connections


Wiring Diagram

Primary: 480 Volts Delta
Secondary: 208Y/120 Volts

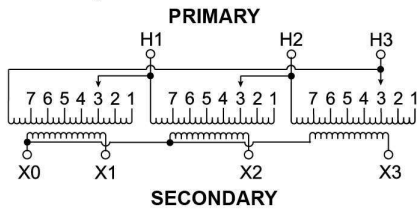

Connections

Primary Volts	On Each Coil Jumper Taps To	Primary Lines Connect To
504	1	H1, H2, H3
492	2	H1, H2, H3
480	3	H1, H2, H3
468	4	H1, H2, H3
456	5	H1, H2, H3
444	6	H1, H2, H3
432	7	H1, H2, H3
Secondary Volts	Secondary Lines Connect To	
208	X1, X2, X3	
120 1 phase	Between X0 and X1 or X2 or X3	

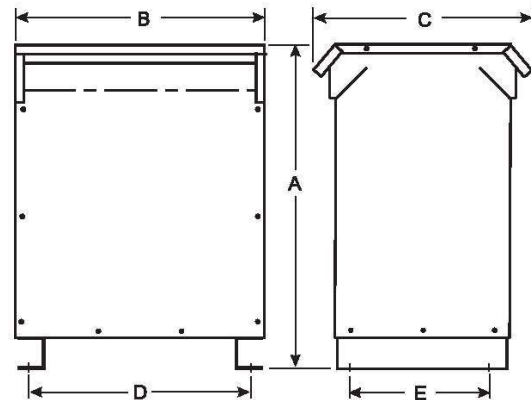

Additional Information

How to Buy: This item is normally available through our Stocking Representatives and Distributors.