

823-9344-500 - Three-Phase Ventilated-USA-DOE

Product Details	
KVA	500.00
UPC#	41576
Enclosure	NEMA 3R Ventilated
Phase	Three-Phase
Line Voltage	480V-Delta
Load Voltage	208Y/120V
E/S Shielded	No
Windings	Aluminum
Temp. rise	150°
Frequency	60 Hz
Taps	2 - 2.5% FCAN; 2 - 2.5% FCBN
Impedance	5.3
Total loss (17°C)	7438.00
Regulation (full load)	PF 1.0=1.82 PF 0.8=4


Product Details	
Efficiency Type	DOE-2016
Minimum Efficiency (35%)	99.14
Sound	60 db Max
Approvals	UL, cUL, DOE

Weight & Dimensions (Imperial / Metric)		
A	60.00"	152.4 cms
B	48.00"	121.92 cms
C	43.50"	110.49 cms
D	42.00"	106.68 cms
E	27.00"	68.58 cms
Est Ship Wt	3220.00 lbs	1460.57 kg

T480E Wiring Diagram & Connections


Wiring Diagram

Primary: 480 Volts Delta
Secondary: 208Y/120 Volts

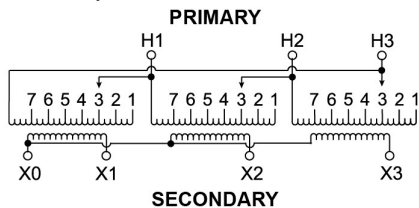

Connections

Primary Volts	On Each Coil Jumper Taps To	Primary Lines Connect To
504	1	H1, H2, H3
492	2	H1, H2, H3
480	3	H1, H2, H3
468	4	H1, H2, H3
456	5	H1, H2, H3
444	6	H1, H2, H3
432	7	H1, H2, H3
Secondary Volts	Secondary Lines Connect To	
208	X1, X2, X3	
120	Between X0 and X1 or X2 or X3	
1 phase	X1 or X2 or X3	

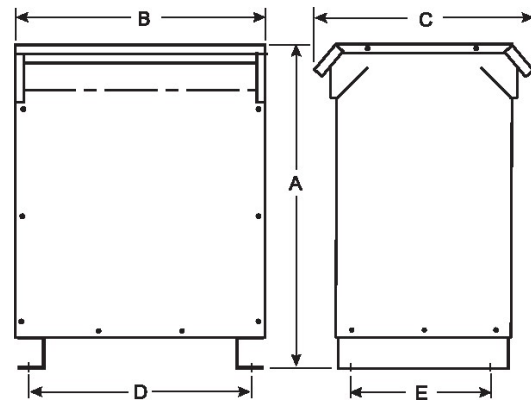

Additional Information

How to Buy: This item is not normally stocked. Contact your local representative.